

NASA Contractor Report 198308

ICASE Report No. 96-22

ICASE

AN EVALUATION OF ARCHITECTURAL PLATFORMS FOR PARALLEL NAVIER-STOKES COMPUTATIONS

D. N. Jayasimha


M. E. Hayder

S. K. Pillay

*NASA Contract No. NAS1-19480
March 1996*

*Institute for Computer Applications in Science and Engineering
NASA Langley Research Center
Hampton, VA 23681-0001*

Operated by Universities Space Research Association



*National Aeronautics and
Space Administration*

*Langley Research Center
Hampton, Virginia 23681-0001*

AN EVALUATION OF ARCHITECTURAL PLATFORMS FOR PARALLEL NAVIER-STOKES COMPUTATIONS

D. N. Jayasimha

Department of Computer and Information Science
The Ohio State University
Columbus, OH 43210
jayasim@cis.ohio-state.edu

*M. E. Hayder**

Institute for Computer Applications in Science and Engineering
NASA Langley Research Center
Hampton, VA 23681-0001
hayder@icase.edu

S. K. Pillay

Scientific Engineering Computing Solutions Office
NASA Lewis Research Center
Cleveland, OH 44142
spillay@lerc.nasa.gov

Abstract

We study the computational, communication, and scalability characteristics of a Computational Fluid Dynamics application, which solves the time accurate flow field of a jet using the compressible Navier-Stokes equations, on a variety of parallel architecture platforms. The platforms chosen for this study are a cluster of workstations (the LACE experimental testbed at NASA Lewis), a shared memory multiprocessor (the Cray YMP), and distributed memory multiprocessors with different topologies — the IBM SP and the Cray T3D. We investigate the impact of various networks connecting the cluster of workstations on the performance of the application and the overheads induced by popular message passing libraries used for parallelization. The work also highlights the importance of matching the memory bandwidth to the processor speed for good single processor performance. By studying the performance of an application on a variety of architectures, we are able to point out the strengths and weaknesses of each of the example computing platforms.

*This research was supported in part by the National Aeronautics and Space Administration under NASA Contract No. NAS1-19480 while the second author was in residence at the Institute for Computer Applications in Science and Engineering (ICASE), NASA Langley Research Center, Hampton, VA 23681-0001.

1 Introduction

Numerical simulations play an important role in the investigation of physical processes as-

sociated with many important problems. The suppression of jet exhaust noise is one such problem which will have a great impact on the success of the High Speed Civil Transport plane. The radiated sound emanating from the jet can be computed by solving the full (time-dependent) compressible Navier-Stokes equations. This computation can, however, be very expensive and time consuming. The difficulty can be partially overcome by limiting the solution domain to the near field where the jet is nonlinear and then using acoustic analogy (see [12]) to relate the far-field noise to the near-field sources. This technique requires obtaining the time-dependent flow field. In this study we concentrate on such flow fields near the nozzle exit. We solve the Navier-Stokes equations to compute time accurate flow fields of a supersonic axisymmetric jet. Our code is computationally very intensive and requires many hours of CPU time on the Cray Y-MP. With the advent of massively parallel processors and networks of workstations (NOWs), scientists now have the opportunity to parallelize computationally intensive codes and reduce turnaround time at a fraction of the cost of traditional supercomputers. Recognizing this, a number of researchers [5, 10, 14, 18] have studied CFD (Computational Fluid Dynamics) applications on specific parallel architectures. Our goal in this study is to implement the numerical model derived from the CFD application described above on a variety of parallel architectural platforms.

The platforms chosen for this study, all from the NASA Lewis Research Center, represent a spectrum of parallel architectures that have been proposed to solve computationally intensive problems: a shared memory vector multiprocessor (the Cray YMP), two distributed memory multiprocessors with different topologies—the IBM SP and the Cray T3D, and a cluster of workstations connected via many networks (the Lewis Advanced Cluster Environment (LACE) [9] experimental testbed). One important architecture that has not been considered in our study is cache-coherent, massively parallel processors typified by the DASH architecture [11].

An earlier paper by the authors presented the results of a study of this application on LACE [6]. This paper differs from the earlier one in two important aspects: i) It is comprehensive covering a gamut of architectures while the other examined the feasibility of NOW architectures as low cost alternatives to expensive supercomputers and massively parallel processors. ii) It focuses on the relationship of the performance results to the computation and communication characteristics of the application, to the architectural aspects of the networks and the processing nodes, and to the programming tools. We have not laid emphasis on the physical aspects of the application or the details of the numerical model as we have done in the other paper in keeping with the readership of two disparate communities. For the sake of completeness, however, we have included the relevant details from the other paper in this one.

In the next section we briefly discuss the governing equations and the numerical model of the application. Section 3 has a discussion of the parallel architectures used in the study and the tools used for parallelizing the application. The parallelization of the application is the subject of Section 4. Section 5 describes the experimental methodology. Section 6

presents a detailed discussion of the results. The paper concludes with a brief discussion of the lessons learned from this study and the issues that merit further investigation.

2 Numerical Model

We solve the Navier-Stokes and the Euler equations to compute flow fields of an axisymmetric jet. The Navier-Stokes equations for such flows can be written, in polar coordinates as

$$LQ = S$$

$$\frac{\partial Q}{\partial t} + \frac{\partial F}{\partial x} + \frac{\partial G}{\partial r} = S$$

where

$$Q = r \begin{pmatrix} \rho \\ \rho u \\ \rho v \\ E \end{pmatrix}$$

$$F = r \begin{pmatrix} \rho u \\ \rho u^2 - \tau_{xx} + p \\ \rho uv - \tau_{xr} \\ \rho uH - u\tau_{xx} - v\tau_{xr} - \kappa T_x \end{pmatrix}$$

$$G = r \begin{pmatrix} \rho v \\ \rho uv - \tau_{xr} \\ \rho v^2 - \tau_{rr} + p \\ \rho vH - u\tau_{xr} - v\tau_{rr} - \kappa T_r \end{pmatrix}$$

$$S = \begin{pmatrix} 0 \\ 0 \\ p - \tau_{\theta\theta} \\ 0 \end{pmatrix}$$

F and G are the fluxes in the x and r directions respectively, and S is the source term that arises in the cylindrical polar coordinates, τ_{ij} are the shear stresses and κT_j are the heat fluxes. In the above equations p , ρ , u , v , T , e and H denote the pressure, density, axial and radial velocity components, temperature, total energy and enthalpy.

We use the fourth-order MacCormack scheme, due to Gottlieb and Turkel [4], to solve the Navier-Stokes and the Euler equations. This scheme uses predictor and corrector steps to compute time accurate solutions. It uses one-sided differences (forward or backward) to compute spatial derivatives at each predictor or corrector step. For the present computations,

the operator L in the equation $LQ = S$, or equivalently $Q_t + F_z + G_r = S$, is split into two one-dimensional operators and the scheme is applied to these split operators. We define L_1 as a one-dimensional operator with a forward difference in the predictor and a backward difference in the corrector. Its symmetric variant L_2 uses a backward difference in the predictor and a forward difference in the corrector. The predictor step in L_1Q for the one-dimensional model split equation $Q_t + F_z + G_r = S$ is written as

$$\bar{Q}_i = Q_i^n + \frac{\Delta t}{6\Delta x} \{7(F_{i+1}^n - F_i^n) - (F_{i+2}^n - F_{i+1}^n)\} + \Delta t S_i$$

and the corrector step as

$$Q_i^{n+1} = \frac{1}{2}[\bar{Q}_i + Q_i^n - \frac{\Delta t}{6\Delta x} \{7(\bar{F}_i - \bar{F}_{i-1}) - (\bar{F}_{i-1} - \bar{F}_{i-2})\} + \Delta t S_i]$$

Similarly in L_2 the predictor step is

$$\bar{Q}_i = Q_i^n - \frac{\Delta t}{6\Delta x} \{7(F_i^n - F_{i-1}^n) - (F_{i-1}^n - F_{i-2}^n)\} + \Delta t S_i$$

and the corrector step is

$$Q_i^{n+1} = \frac{1}{2}[\bar{Q}_i + Q_i^n + \frac{\Delta t}{6\Delta x} \{7(\bar{F}_i - \bar{F}_{i+1}) - (\bar{F}_{i+1} - \bar{F}_{i+2})\} + \Delta t S_i]$$

This scheme becomes fourth order accurate in the spatial derivatives when alternated with symmetric variants [4]. For our computations, the one dimensional sweeps are arranged as

$$Q^{n+1} = L_{1x}L_{1r}Q^n$$

$$Q^{n+2} = L_{2r}L_{2x}Q^{n+1}$$

This scheme is used for the interior points. In order to advance the scheme near boundaries, the fluxes are extrapolated outside the domain to artificial points using a cubic extrapolation to compute the solution on the boundary. We use the characteristic boundary condition at the outflow. In our implementation, we solve the following set of equations to get the solution at the new time for all boundary points.

$$p_t - \rho c u_t = 0$$

$$p_t + \rho c u_t = R_2$$

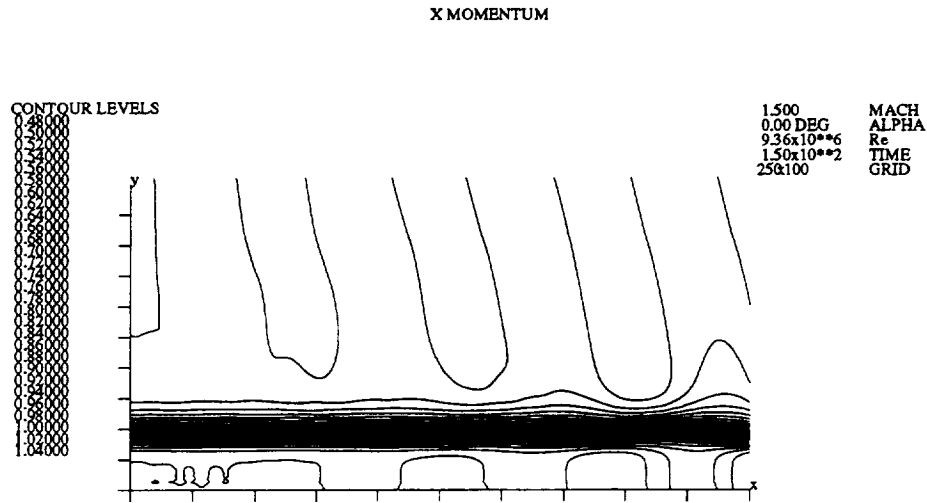


Figure 1: Axial momentum in an excited axisymmetric jet

Let r be the radius of the nozzle. Figure 1 shows a contour plot of axial momentum from the solution of the Navier-Stokes equations for a domain of size $50r$ in the axial direction and $5r$ in the radial direction with a 250×100 grid. The size of the domain and the chosen grid represent a reasonable problem size. The result was obtained after about 16,000 time steps. For all other results in this paper, we have used the same grid, but run the experiments for 5000 time steps to keep the computing requirements reasonable.

This section contains a brief discussion of the various platforms used in the study together with the parallelization tools used.

3.1 NOW

The LACE testbed is regularly upgraded. The present configuration has 32 RS6000 processor nodes (nodes 1–32) and an RS6000/Model 990 (node 0) which is the file server. These nodes or subsets of them are connected through various networks with different speed and

CPUs (the CPU has a 66.5 MHz clock, 256KB data- and 32KB instruction caches) with the following networks interconnecting the nodes: an ATM network capable of a peak bandwidth of 155 Mbps and IBM's ALLNODE switch, referred to as ALLNODE-F (for fast), capable of a peak throughput of 64 Mbps per link. The upper half has the slower RS6000/Model 560 CPUs (the CPU has a 50 MHz clock, 64KB data- and 8KB instruction caches) and is connected through IBM's ALLNODE prototype switch, referred to as ALLNODE-S (for slow), capable of a peak throughput of 32 Mbps per link. The ALLNODE switch is a variant of Omega interconnection network and is capable of providing multiple contentionless paths between the nodes of the cluster (a maximum of 8 paths can be configured between source

processors using the faster networks. The nodes have varying main memory capacity (64 MB, 128 MB, 256 MB, and 512 MB). We have used the popular PVM (Parallel Virtual Machine) message passing library (version 3.2.2) to implement our parallel programs. We will refer to the LACE cluster with RS6000/Model 560 processors as the LACE/560 and those with the RS6000/Model 590 processors as the LACE/590.

3.2 Shared Memory Architecture

We used the Cray Y-MP/8, which has eight vector processors, for this study. The Cray Y-MP/8 has a peak rating of approximately 2.7 GigaFLOPS. It offers a single address space and the communication between processes executing on different processors is through shared variables. We parallelized the application by using a distributed shared memory architecture.

4 Parallelization

The factors which affect performance are listed below.

1. Single processor performance: we will explain various optimizations which resulted in 80% improvement in performance.
2. Communication cost: this cost depends on both the number of communication startups and the volume of data communicated. Usually, the startup cost is 2–3 orders of magnitude higher than the per item (usually byte) transfer cost. One method to reduce the effect of startup cost is to **group** data to be communicated into long vectors.
3. Overlapped communication and computation: it is desirable that communication be overlapped with computation as far as possible. Increasing the amount of overlapping, however, could lead to **finer** granularity of communication which then leads to a higher number of startups.
4. Bursty communication: such communication could overwhelm the network's throughput capacity temporarily leading to increased communication cost and process waiting time. Some amount of burstiness is inevitable since parallel programs are usually written in the SPMD (single program multiple data) style. There is also usually an inverse relationship between bursty data and the number of communication startups.

From the above discussion it is clear that there is a subtle relationship among communication startup cost, overlapping communication with computation, and bursty communication.

For the solution of Navier-Stokes equations, hereafter referred to as **Navier-Stokes**, each internal subdomain exchanges its two flux values, velocity, and temperature along the boundary with its appropriate (left or right) neighbor. To reduce the number of communication startups, we group communication- first, *all* the velocity and temperature values along a boundary are calculated and then packaged into a single **send**. We use a similar scheme for the flux values that need to be communicated.

The computational and communication requirements of the application are shown in Tables 1 and 2. It is seen that the solution of Euler equations, hereafter referred to as **Euler**, has roughly 50% of the computation the communication volume requirements of **Navier-Stokes** although the computation to communication volume ratio is about the same. Note that the communication requirements are shown on a **per processor** basis. To give some idea of the effects of communication, consider **Navier-Stokes** to be executing on a network of 10 workstations connected via Ethernet. Assume a reasonable throughput of 20 MFLOPS per processor and the maximum throughput of 10 Mbps for Ethernet. The computation time will then be approximately 725 seconds ($145,000/(10 \times 20)$) while a **lower bound** on the communication time, ignoring the effect of startups, is 1000 seconds ($1000 \times 10/10$)! Table 2 shows the ratio of computation to communication for the application in units of floating point operations/byte transferred per processor and floating point operations/startup per processor.

The application is parallelized by decomposing the domain by **blocks** along the axial direction only. Two dimensional partitioning was not attempted since a simple analysis shows

Table 1: Application Characteristics

Appln	Total Comp. (in FP Ops ($\times 10^6$))	Comm./Processor	
		Start-ups	Volume (MB)
N-S	145,000	80,000	120 (960Mb)
Euler	77,000	20,000	64 (512Mb)

Table 2: Computation-Communication Ratios

No. of Procs.	FPs/Byte		FPs/Start-up	
	Nav-Stokes	Euler	Nav-Stokes	Euler
2	604	601	906K	1925K
4	302	301	453K	963K
8	151	150	227K	481K
16	76	75	113K	241K

that for the chosen grid size, such a partitioning performs worse than a 1-D block partitioning. For example, with a 2-D partitioning of 16 processors (4×4 blocks), the ratio of the number of bytes transferred compared to 1-D partitioning is 1.25. This ratio will, of course, decrease when we increase the problem size. Another disadvantage with 2-D partitioning is that the number of start-ups is higher. For the above example, the corresponding ratio for the two partitionings is 1.6; this ratio does not decrease with the problem size. Since the startup cost dominates the transmission cost in most current architectures including the ones used in this study (the ratio is highest for LACE and least for Cray T3D) and the average transmission volume per startup is only moderate (Table 1), we did not experiment with 2-D partitioning.

The parallelization on the Cray Y-MP was done differently (it was much easier also) since it is a shared memory architecture: we did some hand optimization to convert some loops to parallel loops, used the DOALL directive, and partitioned the domain along the orthogonal direction of the sweep to keep the vector lengths large and to avoid non-stride access to most of the variables.

5 Experimental Methodology

The performance indicator is the total execution time. All experiments were conducted in single user mode. The execution times reported are for single runs since we found that the experiments were repeatable with negligibly small discrepancies. For example, with LACE, the deviation from the mean is about 1% or less ([6]).

Experiments using a single processor were done on an IBM RS6K (Model 560) workstation of LACE. The performance of the original code (Version 1) for both applications is shown

in Figure 2.

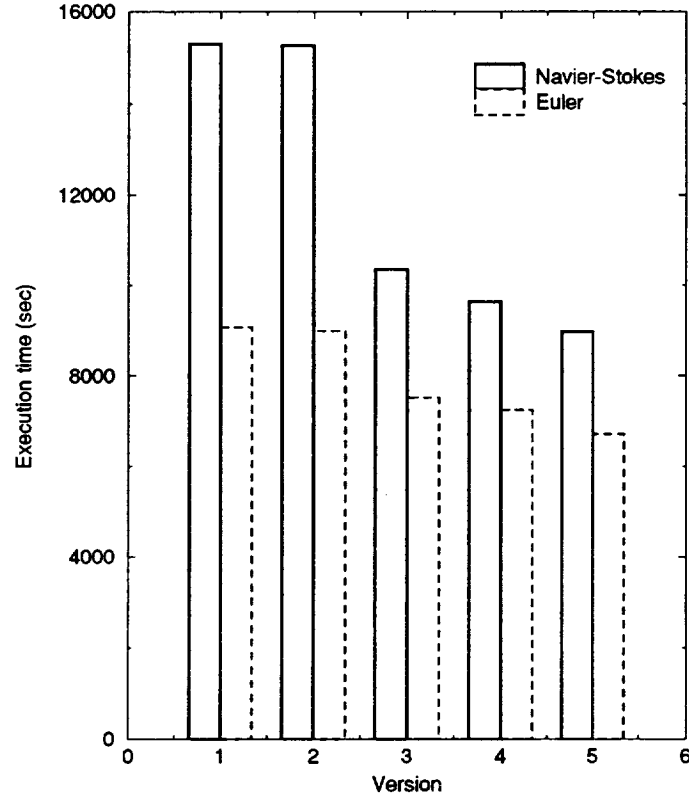


Figure 2: Execution time on a single processor (RS6000/560)

We found that most parts of the application were limited by the poor performance of the memory hierarchy involving the cache and the main memory. Improved cache performance was the key and this was achieved by accessing arrays in **stride-1** fashion wherever possible (using the loop interchange optimization). The modified program, called Version 3 (the optimizations were performed in a different order than presented in the paper), resulted in this version running faster by approximately 50%, compared to Version 2. We experimented with a number of other modifications, the following of which yielded some improvement: better register usage by collapsing multiple COMMON blocks into a single one (Version 5), strength reduction (replace exponentiations by multiplications wherever feasible— Version 2), replace division by multiplication wherever feasible since the former are relatively expensive (a reduction from 5.5×10^9 divisions to 2.0×10^9 was achieved— Version 4). All these optimizations yielded an overall improvement of roughly 80% (from 9.3 MFLOPS to 16.0 MFLOPS) as illustrated in Figure 2. The optimizations were incorporated in sequence so that Version 5 contains all the above mentioned optimizations.

We parallelized Version 5 on different computing platforms in accordance with the ideas presented in the last section. On each platform, we measured the execution time as a function of the number of processors (up to 8 with Cray Y-MP, up to 16 with LACE, IBM SP, and Cray T3D).

We have studied the performance of LACE with four networks of differing characteristics

using “off-the-shelf” PVM as the message passing library. With the IBM SP, we have studied the impact of parallelizing the application with two message passing libraries- IBM’s native MPL and a customized version of PVM called PVMe.

In all experiments, wherever feasible, we have separated the execution time into two additive components: **processor busy time** and **non-overlapped communication time**. The processor busy time is itself composed of the actual computation time and the software overheads associated with sending and receiving messages. An accurate separation of these components is not possible, however, unless we have hardware performance monitoring tools. The non-overlapped communication time could also include the idle time of a processor waiting for a message.

Version 5 of the application does not make any special attempts to overlap communication with computation. Version 6 does overlapping by computing the stress and flux components of the interior part of each subdomain while the processor is waiting for the velocity and temperature vectors from its neighbors. Figure 3 shows the timeline of a processor’s activity for both these versions. As mentioned earlier, the two “flux columns” nearest each boundary are combined into a single send. We have experimented with sending the flux columns one at a time to avoid bursty communication. This variant is called Version 7.

VERSION 5

□ Calculate
VEL. TEMP

VERSION 6

□ Calculate
VEL. TEMP

6 Results

The execution times of **Navier-Stokes** and **Euler** have been plotted as a function of the number of processors for each computing platform, using a log-log scale to facilitate meaningful presentation.

6.1 Performance of LACE

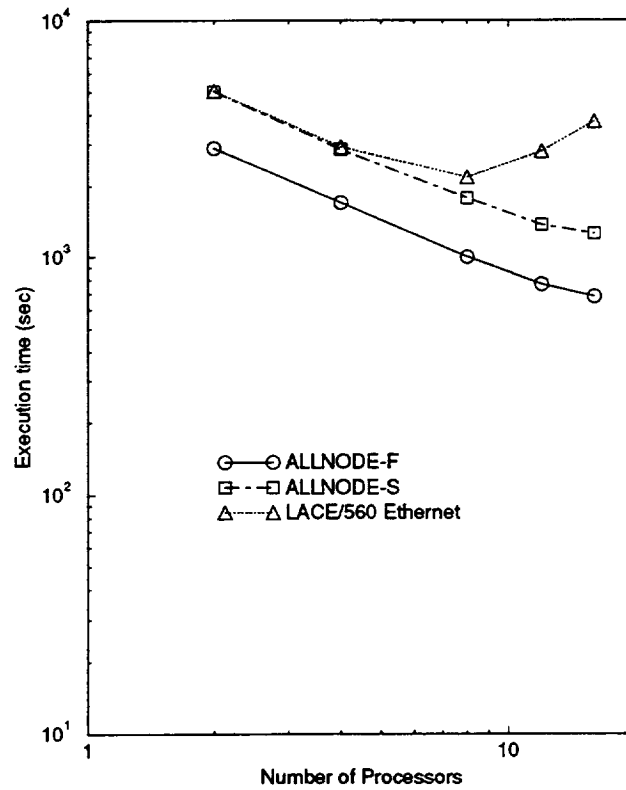
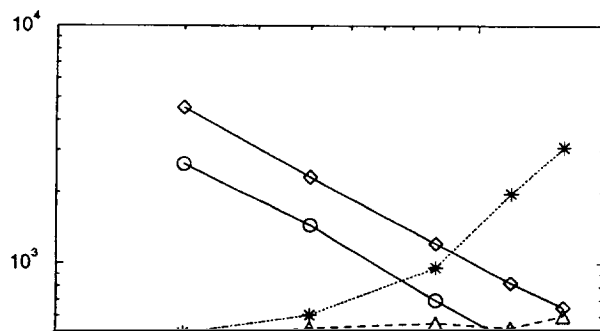


Figure 4: Navier-Stokes execution time on LACE

Figure 4 shows the performance of **Navier-Stokes** on different networks of LACE- ALLNODE-F, ALLNODE-S, and the upper-half Ethernet. The performance of the ATM and the FDDI networks are almost identical with ALLNODE-F and ALLNODE-S respectively. Hence the

(which is twice as fast) and the superior performance of the 590 model (33% faster clock, data and instruction caches which are 4 times bigger, and memory bus which is 4 times wider than the 560- these contribute to faster instruction execution, better cache hit ratios, and lower cache miss penalty respectively). Ethernet performance reaches its peak at 8 processors- beyond this, the communication requirements of the application overwhelm the network. The inability of Ethernet to handle traffic beyond 8 processors is shown by the following simple argument: Table 2 shows that with 8 processors **Navier-Stokes** produces a byte

for communication after it has completed 151 floating operations on the average. Consider a 1 second interval and each processor operating at 20 MFLOPS. During this interval, each processor produces 1.06 Mb for communication, on the average. This translates to approximately 8.5Mbs from all the 8 processors. Ethernet is capable of supporting 10Mbps peak- the performance seen by an application will be a fraction of this bandwidth, however; it is not surprising, therefore, the performance gets steadily worse beyond 8 processors.



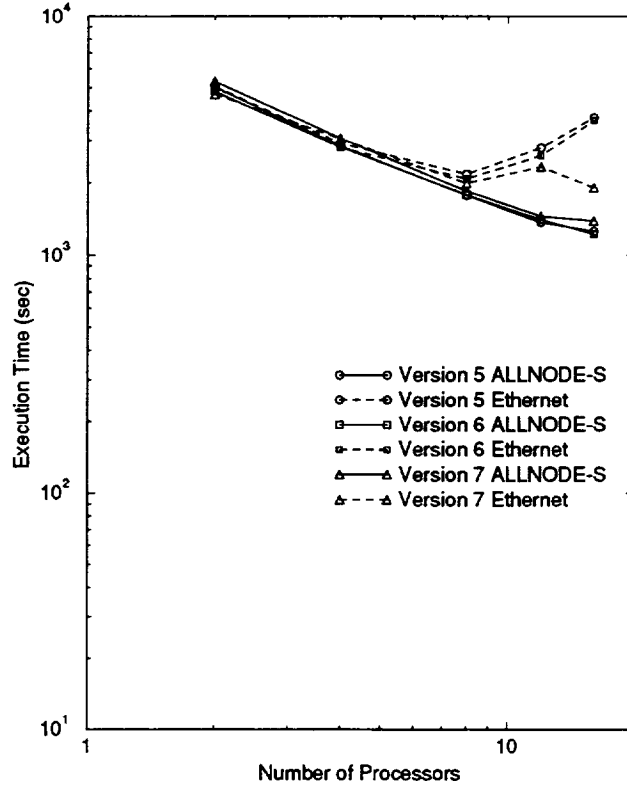


Figure 6: Communication optimization (Navier-Stokes; LACE)

Figures 6 and 7 show the performance of Versions 5, 6, and 7 with Ethernet and ALLNODE-S (the trends are similar with ALLNODE-F). The performance of Version 6 (with overlapped communication and computation, as explained in Section 5) is very close to that of Version 5 for both Ethernet and ALLNODE-S. Overlapping does not increase the number of communication startups. With Version 6, since computations for the subdomain have to be broken into separate ones for the interior and the boundary (only the former computations can be overlapped with communication), the loop setup overheads are higher. Further, the cache performance also degrades slightly due to loss of temporal locality. Consequently, these overheads offset any gain due to overlapping.

Version 7 attempts to reduce bursty communication at the cost of increased number of communication startups. Not surprisingly, Ethernet performs better with Version 7 than with Version 5. The performance of ALLNODE-S is appreciably worse than Version 5, however. Since ALLNODE-S can handle the communication requirements of the application, reducing bursty communication only harms the performance since the number of startups increase.

6.2 Comparative Performance

Figures 8 and 9 show the performance of the application on the four computing platforms we have chosen for this study— LACE, Cray Y-MP, Cray T3D and IBM SP. The performance

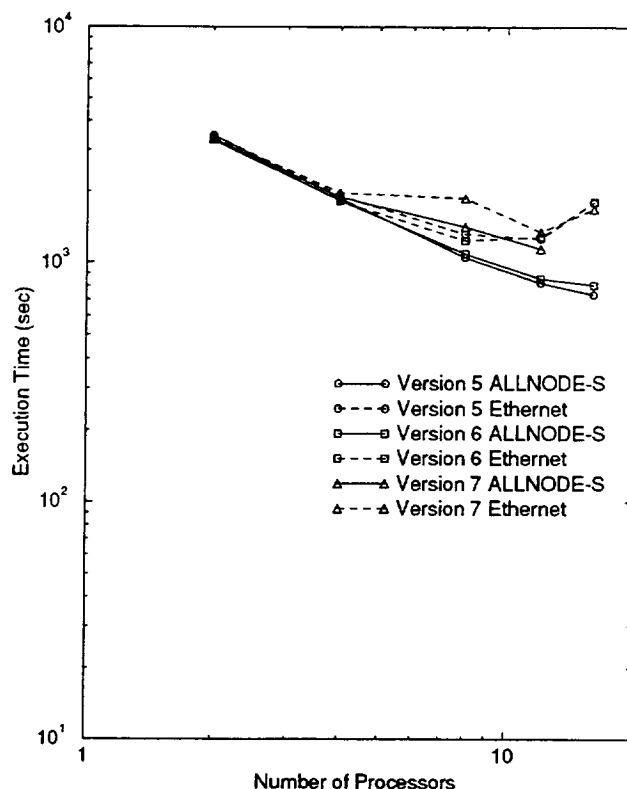


Figure 7: Communication optimization (**Euler**; LACE)

of LACE is reported for ALLNODE-F and ALLNODE-S.

Surprisingly, LACE, even with ALLNODE-S, outperforms SP even though the former uses off-the-shelf PVM and the latter uses MPL, IBM's native message passing library. (Our version of) MPL imposes a limit on the number of (non-blocking) **send** primitives that can be simultaneously active- this limit is lower than the requirements of the application; hence, we were forced to use blocking **send** primitives. We suspect this to be one contributing factor to the relatively poor performance. The CPU on the SP is intermediate in speed (62.5 MHz clock) between the 560 (50 MHz) and the 590 (66.6MHz). Another contributor to the poor performance of the SP is the relatively small size of the data cache (32KB compared to 64KB on LACE/560 and 256KB on LACE/590).

For a comparison of ALLNODE-F and ALLNODE-S, see Section 6.1 (Figures 4 and 5).

Another surprising result is the relatively poor performance of Cray T3D which is consistently worse than ALLNODE-F and is worse than ALLNODE-S for less than 8 processors. The T3D's CPU has a peak rating which is 2.3X and 3X the rating of the 590 and 560 models, respectively. We attribute the T3D's poor performance to the small direct-mapped cache of 8KB size (both the 560 and 590 have 4-way set-associative data caches of sizes 64KB and 256 KB respectively; in addition they have 2-way set associative instruction caches of sizes 8KB and 32KB). Poor single-processor performance on the T3D has also been reported elsewhere [17]. These results stress the importance of superior cache design to the overall performance. A reasonably fast CPU with a large, set associative cache and a high bandwidth

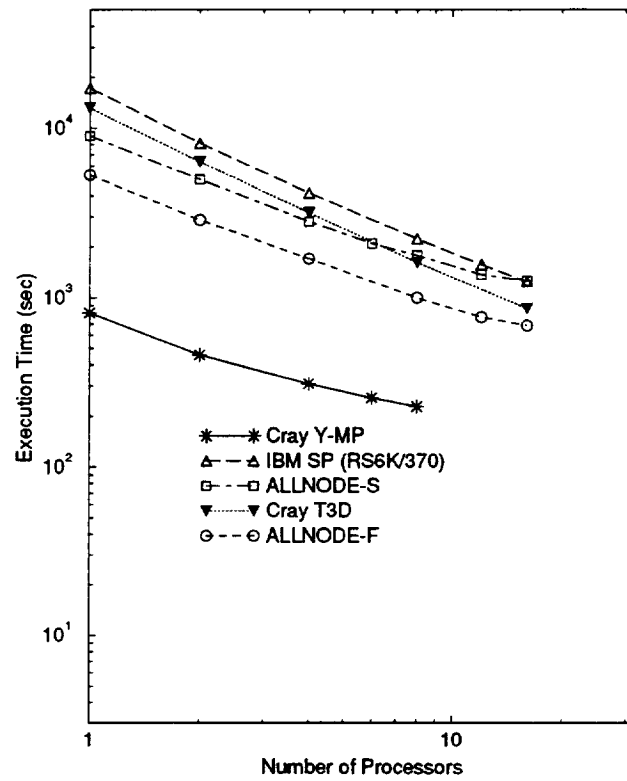


Figure 8: Execution time of **Navier-Stokes** on computing platforms

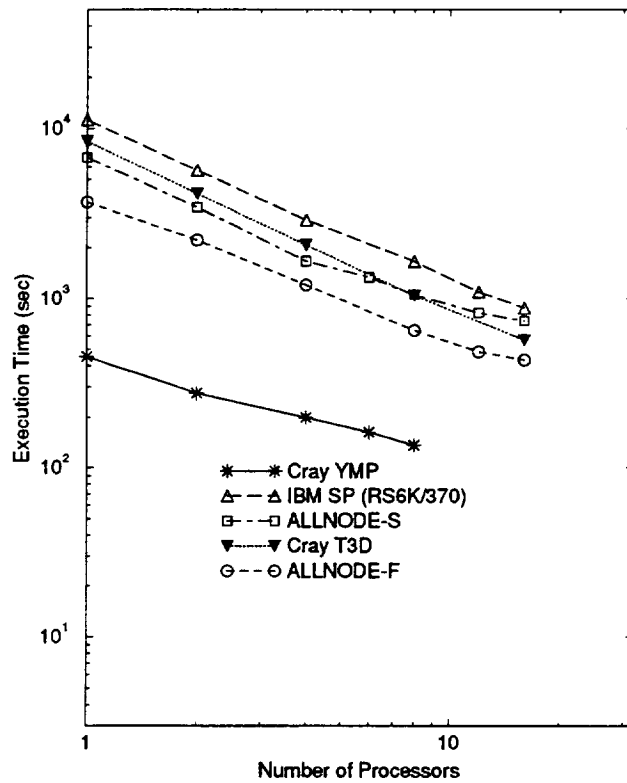


Figure 9: Execution time of **Euler** on computing platforms

Table 3: Speedup Characteristics

No. of Procs.	Architectural Platform			
	ALLNODE-S	ALLNODE-F	IBM SP	Cray T3D
4	3.2	3.4	3.8	3.9
16	7.5	7.9	13.3	14.6

bus connecting the cache and main memory performs superior to a much faster CPU with poorly designed CPU-cache and cache-main memory interfaces.

Table 3 shows the speedup characteristics of **Navier-Stokes** with various architectures. The speedups, measured relative to the single processor performance of the corresponding architecture, are shown with 4 processors and 16 processors to illustrate the network characteristics of each architecture. Both T3D and SP exhibit very good speedup characteristics, with almost linear speedup, indicating that the corresponding networks can sustain the communication requirements of the application. Though both the ALLNODE networks have a reasonable speedup at 4 processors, they degrade rapidly and the speedup is only modest at 16 processors. It is only reasonable to expect this flattening trend to continue with increasing number of processors on NOW architectures. Not surprisingly, ALLNODE-F has a slightly better speedup than ALLNODE-S. Also, observe from Figures 8 and 9 that beyond 8 processors, T3D with its superior network speed (150 MB/sec peak transfer rate and a

relatively small setup cost) performs better than ALLNODE-S.

Cray Y-MP has by far the best performance. The execution time shown is the connect time in single user mode (this includes the I/O time also which we were not able to separate from the computation time). Considering the effect of connect time also, the Y-MP scales modestly achieving a speedup of about 3.5 with 8 processors for both the applications. With a profiling tool which simulates the execution of an 8-node Y-MP on a single node (and does not include the I/O overheads), we obtained a speedup of 7.1. Observe that the LACE/590 with 16 processors is about 8% faster than a single node of the Y-MP.

With architectures which use message passing libraries, the relatively poor performance can be attributed to large setup overheads and the resulting increase in processor waiting times with increasing number of processors. These overheads arise mainly from the multiple times that data to be communicated is copied and from the context switching overheads that arise in transferring a message between the application level and the physical layer of the network for transmission or reception. If NOW architectures are to be feasible as massively parallel processors, it is clear that both the interconnection network and the message passing library be implemented efficiently. Such effort is already under way [1].

6.3 Comparison of Message Passing Libraries

Figures 10 and 11 compare the performance of the PVMe and the MPL message passing libraries on the SP—the execution times have been separated into non-overlapping computation and communication components. The graphs show that MPL is consistently faster

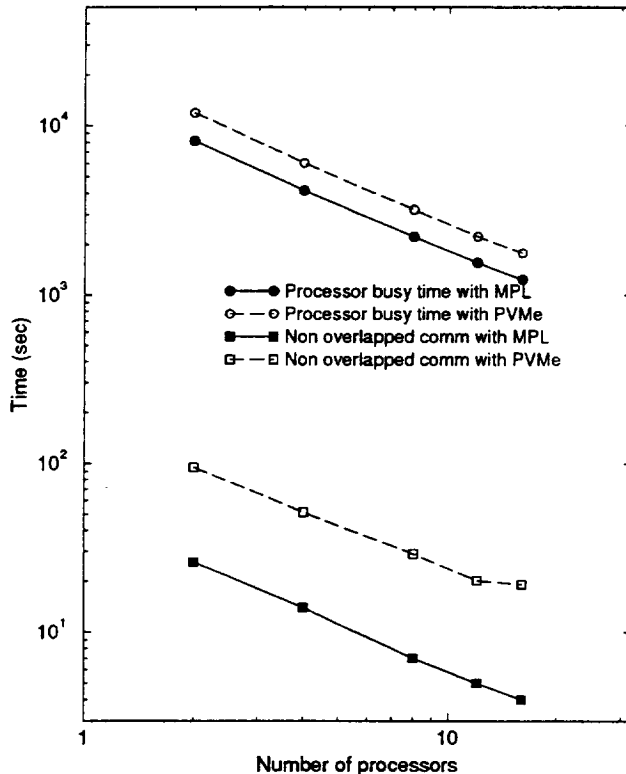


Figure 10: Comparison of MPL and PVMe (Navier-Stokes; IBM SP)

than PVMe by approximately 75% for **Navier-Stokes** and approximately 40% for **Euler**. Observe also that the amount of non-overlapped communication is not only negligibly small but that it decreases with the number of processors though the actual communication increases. This is an interesting phenomenon since it implies that there is increased overlapping of computation and communication with the number of processors. Note however that the computation part also includes the setup overheads of communication. This phenomenon is not seen in case of LACE (see Figure 4) where the non-overlapped communication increases, further attesting to our previous observation that the MPL (and PVMe) library does not perform as well as PVM does on LACE.

6.4 Load Balancing

Finally, how well is the application load balanced? The amount of computation for the application is evenly distributed but this may not always translate to a load balanced execution. We were able to measure the processor busy times (this time does *not* include the processor

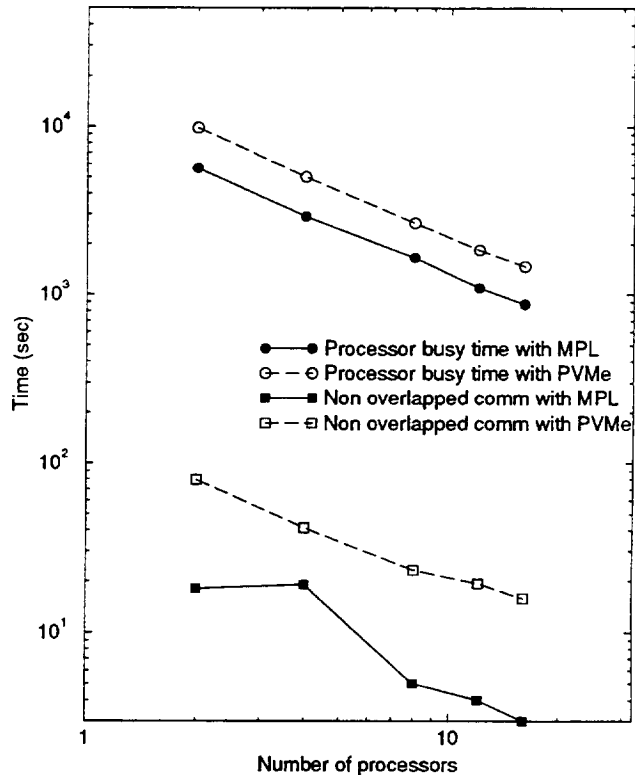


Figure 11: Comparison of MPL and PVMe (**Euler**; IBM SP)

waiting time) for **Navier-Stokes** on each processor of the SP. Figure 12 shows that we were able to achieve almost perfect load balancing.

7 Discussion and Conclusion

In this paper we have studied the computational, communication, and scalability characteristics of a typical CFD application on a variety of architectural platforms. The study indicates that NOW architectures have the potential to be cost-effective parallel architectures if the networks are made reasonably fast and message passing libraries are efficiently implemented to circumvent the traditional overheads involved in transferring a message between the application level and the physical layer of the network.

The study also highlights the importance of single processor performance to achieve good performance. With fast, off-the-shelf RISC processors available, the bottleneck seems to be the performance of the cache and the memory hierarchy. A proper cache design is critical to good performance. We believe that the reason for relatively poor performance of the T3D, in spite of a fast processor, is the small, direct-mapped cache.

A traditional vector multiprocessor still outperforms multiprocessors of modest to medium size. Parallelizing an application using message passing libraries is rather tedious and even error-prone but with distributed memory multiprocessors, this effort is worthwhile since good

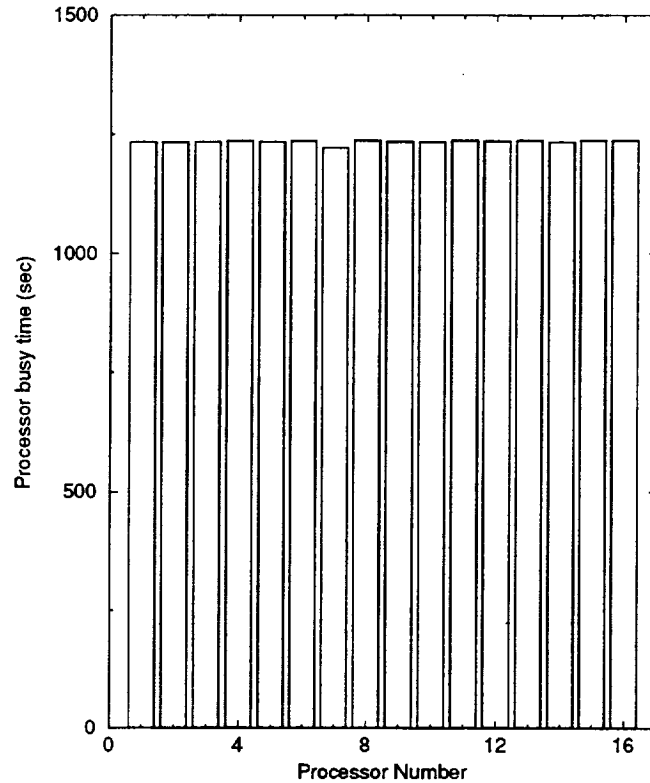


Figure 12: Processor busy times (Navier-Stokes; IBM SP)

scalability is achievable.

Resource limitations have forced us to limit our study to 16 processors. We hope to extend the study to larger multiprocessors and to other parallelization tools as resources become available. For reasons mentioned in Section 4, we have not explored decomposition along both the axial and radial directions. A future goal is to conduct the study for a larger domain to understand the physics of the problem better and a finer mesh to compute the jet noise directly from the flow field. We plan to explore the effects of 2-D partitioning with a larger domain and a finer mesh.

Acknowledgments

Part of this work was done while the first author was a Visiting Senior Research Associate at NASA Lewis Research Center during 1993-94. Simulations were done while the second author was in residence in the ICOMP program at NASA Lewis Research Center, Cleveland, OH.

The authors would like to thank Kim Ciula, Dale Hubler, and Rich Rinehart for their assistance with various aspects of the LACE and IBM SP architectures.

References

- [1] Anderson, T. A., Culler, D. E., Patterson, D. A., NOW team, "A Case for NOW (Networks of Workstations)". *IEEE Micro*, February 1995, pp. 54 - 64.
- [2] Bailey, D. H., Barszcz, E., Dagum, L., Simon, H. D. "NAS Parallel Benchmark Results". *NAS Technical Report NAS-94-001*, October 1994.
- [3] Geist, A., Beguelin, A., Dongarra, J., Jiang, W., Manchek, R. and Sunderam, V. "PVM 3 User's Guide and Reference Manual", *Technical Report ORNL/TM-12187*, Oak Ridge National Laboratory, Oak Ridge, TN, 1993.
- [4] Gottlieb, D. and Turkel, E. "Dissipative Two-Four Methods for Time Dependent Problems". *Math. Comp.* vol. 30, 1976, pp. 703-723.
- [5] Hayder, M. E., Flannery, W. S., Littman, M. G., Nosenchuck, D. M. and Orszag, S. A. "Large Scale Turbulence Simulations on the Navier-Stokes Computer". *Computers and Structures*, vol. 30, no. 1/2, 1988, pp. 357-364.
- [6] Hayder, M. E. and Jayasimha, D. N. "Navier-Stokes Simulations of Jet Flows on a Network of Workstations", *AIAA Journal*, vol. 34, no. 4, April 1996, to appear.
- [7] Hayder, M. E. and Turkel, E. "High Order Accurate Solutions of Viscous Problems". *31st AIAA Aerospace Sciences Conference*, AIAA 93-3074, July 1993.
- [8] Hayder, M. E. Turkel, E. and Mankbadi, R. R. "Numerical Simulations of a High Mach Number Jet Flow". *31st AIAA Aerospace Sciences Conference*, AIAA 93-0653, January 1993.
- [9] Horowitz, J. G. "Lewis Advanced Cluster Environment". Distributed Computing for Aerosciences Applications Workshop, NASA Ames Research Center, October 1993.
- [10] Landsberg, A. M., Young, T. R. and Boris, J. P. "An Efficient, Parallel Method for Solving Flows in Complex Three Dimensional Geometries". *32nd AIAA Aerospace Sciences Conference*, AIAA 94-0413, January 1994.
- [11] Lenoski, D. E., et al. "The Directory-Based Cache Coherence Protocol for the DASH Multiprocessor". *Int'l Conf. on Computer Architecture*, May 1990, pp. 148-159.
- [12] Lighthill, M. J. "On Sound Generated Aerodynamically, Part I, General Theory". *Proc. Roy. Soc. London*, vol. 211, 1952, pp. 564-587.
- [13] Mankbadi, R. R., Hayder, M. E. and Povinelli, L. A. "The Structure of Supersonic Jet Flow and Its Radiated Sound". *AIAA Journal*, vol. 32, no. 5, pp 897-906, 1994.
- [14] Morano, E. and Mavriplis, D. "Implementation of a Parallel Unstructured Euler Solver on the CM-5". *32nd AIAA Aerospace Sciences Conference*, AIAA 94-0755, January 1994.

- [15] Oed, W. "The Cray Research Massively Parallel System- Cray T3D", *Technical Report*, Cray Research GmbH, November 1993.
- [16] Scott, J. N., Mankbadi, R. R., Hayder, M. E. and Hariharan S. I. "Outflow Boundary Conditions for the Computational Analysis of Jet Noise". *31st AIAA Aerospace Sciences Conference*, AIAA 93-4366, October 1993.
- [17] Stunkel, C. B., Shea, D. G., Grice, D. G., Hochschild, P.H., Tsao, M. "The SP1 High-Performance Switch", *Scalable High Performance Computing Conference*, May 1994, pp. 150–157.
- [18] Venkatakrishnan, V. "Parallel Implicit Unstructured Grid Euler Solvers". *32nd AIAA Aerospace Sciences Conference*, AIAA 94-0759, January 1994.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE March 1996	3. REPORT TYPE AND DATES COVERED Contractor Report		
4. TITLE AND SUBTITLE AN EVALUATION OF ARCHITECTURAL PLATFORMS FOR PARALLEL NAVIER-STOKES COMPUTATIONS		5. FUNDING NUMBERS C NAS1-19480 WU 505-90-52-01		
6. AUTHOR(S) D. N. Jayasimha M. E. Hayder S. K. Pillay				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Institute for Computer Applications in Science and Engineering Mail Stop 132C, NASA Langley Research Center Hampton, VA 23681-0001		8. PERFORMING ORGANIZATION REPORT NUMBER ICASE Report No. 96-22		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Langley Research Center Hampton, VA 23681-0001		10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA CR-198308 ICASE Report No. 96-22		
11. SUPPLEMENTARY NOTES Langley Technical Monitor: Dennis M. Bushnell Final Report Submitted to Journal of Supercomputing.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified-Unlimited Subject Category 60, 61		12b. DISTRIBUTION CODE		
13. ABSTRACT (Maximum 200 words) We study the computational, communication, and scalability characteristics of a Computational Fluid Dynamics application, which solves the time accurate flow field of a jet using the compressible Navier-Stokes equations, on a variety of parallel architecture platforms. The platforms chosen for this study are a cluster of workstations (the LACE experimental testbed at NASA Lewis), a shared memory multiprocessor (the Cray YMP), and distributed memory multiprocessors with different topologies — the IBM SP and the Cray T3D. We investigate the impact of various networks connecting the cluster of workstations on the performance of the application and the overheads induced by popular message passing libraries used for parallelization. The work also highlights the importance of matching the memory bandwidth to the processor speed for good single processor performance. By studying the performance of an application on a variety of architectures, we are able to point out the strengths and weaknesses of each of the example computing platforms.				
14. SUBJECT TERMS Computational Fluid Dynamics; Navier-Stokes and Euler Equations; Network of Workstations Architectures; Interconnection Network; Message Passing Library; Computation and Communication; Scalability; Shares Memory			15. NUMBER OF PAGES 22	
			16. PRICE CODE A03	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMITATION OF ABSTRACT	

